SWITCHERS

MPS 601

Media Presentation Switcher

The Extron MPS 601 is a compact six input, one output media presentation switcher for digital and analog sources. It offers four, HDCP-compliant HDMI inputs and two RGB video inputs with analog stereo audio. RGB video and analog audio are digitized and switched through the HDMI output. The MPS 601 features EDID Minder®, which maintains continuous EDID communication with connected devices and ensures that the sources power up properly and maintain correct video output. Multiple control options, including front panel, RS-232, contact closure with tally output, and auto-input switching, simplify integration into a variety of system designs. The MPS 601 is ideal for applications that require the routing of digital and analog sources to a single display.

FEATURES

- Integrates HDMI, RGB, and audio sources into presentation systems
- Digitizes RGB and analog audio signals, and switches them through the HDMI output
- HDMI audio embedding
- EDID Minder® automatically manages EDID communication between connected devices
- Supports computer video up to 1920x1200, including HDTV 1080p/60 and 2K
- Automatic input cable equalization to 50 feet (15 meters) at 1080p/60 with 8-bit color when used with Extron HDMI Pro Series cable
- Audio input assignment for integration flexibility
- Multiple control options including front panel, RS-232, contact closure, and auto-input switching
- Rack-mountable, 1U, half rack width metal enclosure



NOW SHIPPING

Model	Version Description	Part Number
MPS 601	Six Input HDMI, VGA, & Audio Switcher	60-1377-01

AUDIO PRODUCTS


SM 26

SpeedMount Two-Way Surface Mount Speakers with 6.5" Woofer

The Extron SM 26 SpeedMount® Surface Mount Speaker is a two-way speaker with a patent pending, concealed wall mounting system. It features a 6.5" (16.5 cm) woofer with dual tuned ports and a 1" (2.5 cm) tweeter. The SM 26 provides a wide frequency range from 70 Hz to 18 kHz, and a power rating of 60 watts continuous pink noise, 120 watts continuous program capacity. The Extron-exclusive mounting system is designed to accommodate division-of-labor installations and save costs. The SM 26 is available as an 8 ohm model, and an SM 26T version which can operate in 8 ohm direct as well 70 volt and 100 volt modes. The SM 26T features a 6 position power tap selector, which can conveniently be accessed through the grille from outside the speaker.

FEATURES

- Patent pending, concealed mounting system
- Includes 0° mounting plate and 10° mounting adapter
- Designed to accommodate division-of-labor installations and save costs
- 1" (2.5 cm) silk dome tweeter
- 6.5" (16.5 cm) long-throw woofer with dual tuned bass reflex ports
- Two versions available
- Convenient 6 position, through-the-grille power tap selector on the SM 26T
- Optional yoke mount allows 180° of speaker pivot in 10° detented steps, part # 70-993-02 and 70-993-03
- Frequency range: 70 Hz to 18 kHz
- 60 watts continuous pink noise, 120 watts continuous program
- Internal driver overload protection
- Hidden locking speaker release mechanism
- Black or white high-impact enclosure
- 5 year parts and labor warranty

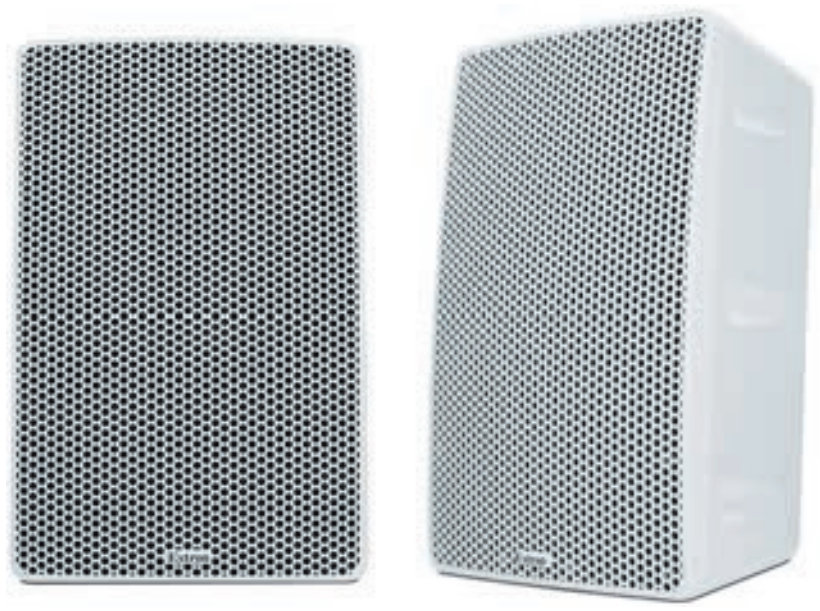

SPEED MOUNT

See animated demonstration of SpeedMount installation
www.extron.com/sm26install

NOW SHIPPING

Model	Version Description	Part Number
SM 26	8 ohm - Black, Pair	60-1308-02
SM 26	8 ohm - White, Pair	60-1308-03
SM 26T	Transformer - Black, Pair	60-1308-12
SM 26T	Transformer - White, Pair	60-1308-13
Yoke Mount	Yoke Mount for SM 26, Pair - Black	70-993-02
Yoke Mount	Yoke Mount for SM 26, Pair - White	70-993-03